


Dieselheat Exhaust Cowl Install Instructions




Preferred Option For Floor Which is Flat Underneath.
 These instructions use a DH15 as an example, for DH9, DH30 and E-Solar the same procedure for the exhaust cowl applies.


STEP 1: USE THE MOUNTING PLATE AS A TEMPLATE TO MARK OUT THE HOLE/S IN THE FLOOR AND THEN INSTALL THE TANK

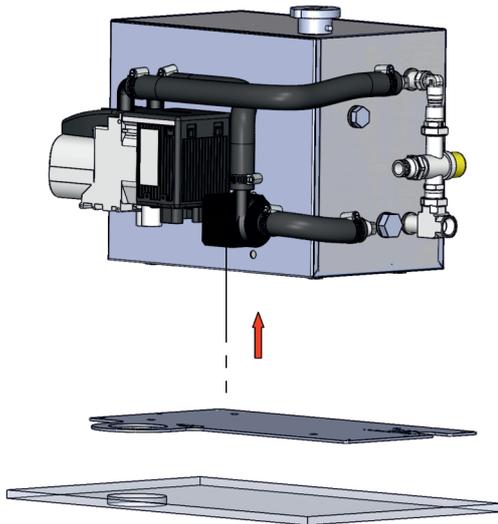


STEP 2: INSTALL THE EXHAUST FROM UNDER THE FLOOR

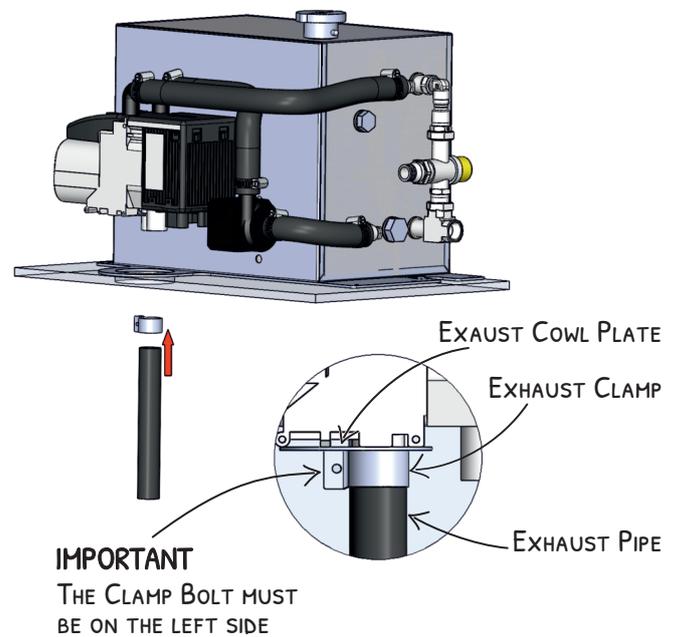

STEP 3: INSTALL THE EXHAUST COWL FROM UNDER THE FLOOR, PUSH UP EXHAUST COWL CLAMP AND SECURE IN PLACE

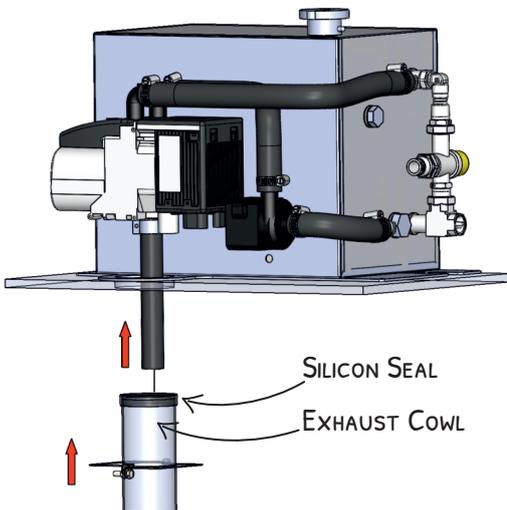


STEP 4: CHECK THE SILICON SEAL IS PUSHED AGAINST THE COWL PLATE AND THE COWL IS SECURE

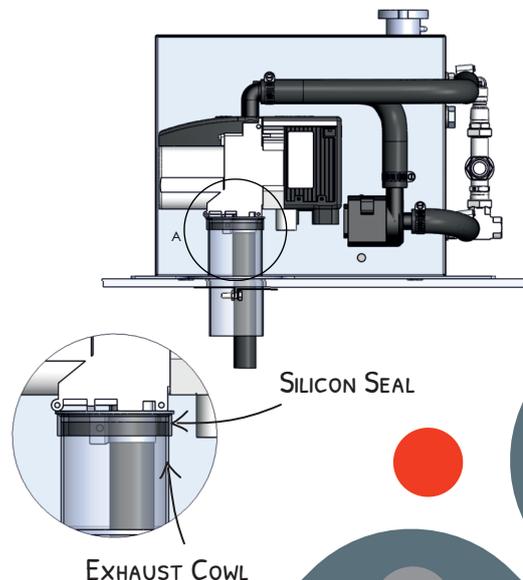


Alternative Option - Floors Which are Not Flat Underneath (eg Vehicle Floors)


STEP 1: USE THE MOUNTING PLATE TO MARK OUT THE HOLE/S IN THE FLOOR AND THEN INSTALL THE TANK

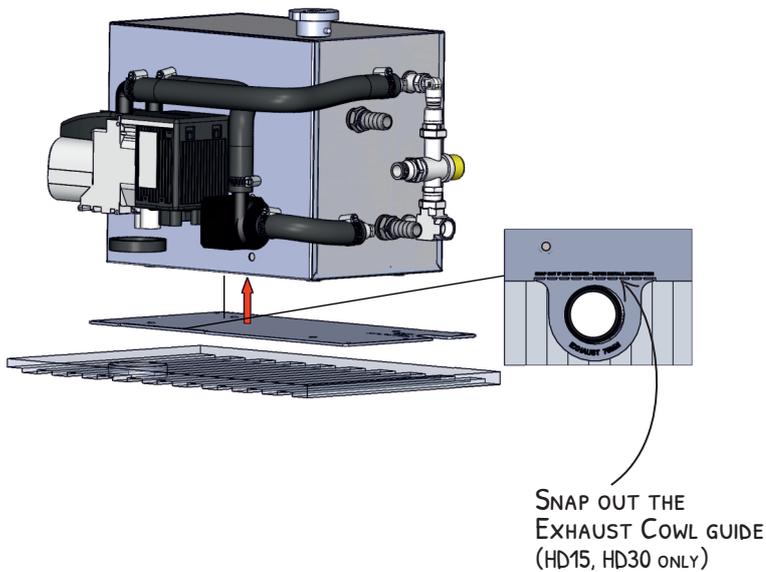

STEP 2: INSTALL THE EXHAUST FROM UNDER THE FLOOR

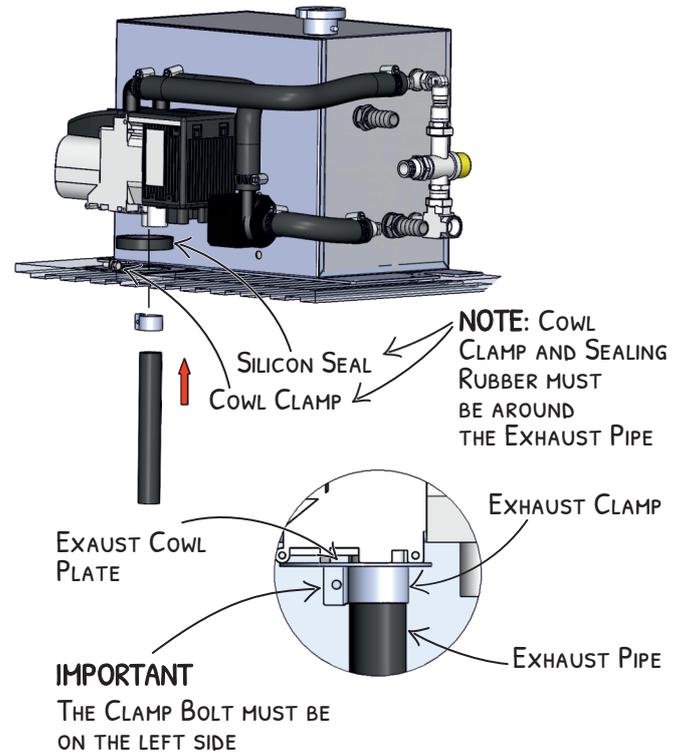

STEP 3: INSTALL THE EXHAUST COWL FROM UNDER THE FLOOR

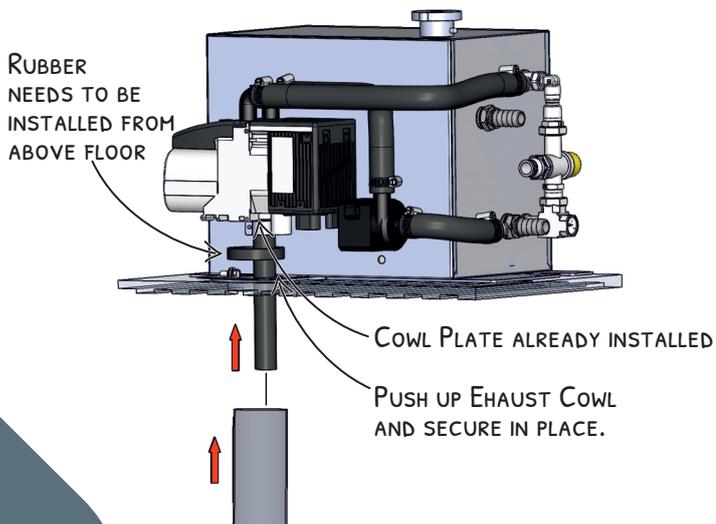

STEP 4: CHECK THE SILICON SEAL IS PUSHED AGAINST THE COWL PLATE AND THE COWL IS SECURE

